


## 5300 Series Medium Duty Double Row Angular Contact Ball Bearings



Part Number	Dimensions			Load Rating		Weight (kg)
	d	D	B	Dynamic (N)	Static (N)	
5300	10	35	19	10100	5600	0.092
5300-2RS	10	35	19	10100	5600	0.092
5300-ZZ	10	35	19	10100	5600	0.092
5301	12	37	19	13000	7300	0.109
5301-2RS	12	37	19	13000	7300	0.109
5301-ZZ	12	37	19	13000	7300	0.109
5302	15	42	19	15100	9150	0.130
5302-2RS	15	42	19	15100	9150	0.130
5302-ZZ	15	42	19	15100	9150	0.130
5303	17	47	22.2	21200	12500	0.180
5303-2RS	17	47	22.2	21200	12500	0.180
5303-ZZ	17	47	22.2	21200	12500	0.180
5304	20	52	22.2	22100	14300	0.220
5304-2RS	20	52	22.2	22100	14300	0.220
5304-ZZ	20	52	22.2	22100	14300	0.220
5305	25	62	25.4	31200	20800	0.350
5305-2RS	25	62	25.4	31200	20800	0.350
5305-ZZ	25	62	25.4	31200	20800	0.350
5306	30	72	30.2	41000	28500	0.530
5306-2RS	30	72	30.2	41000	28500	0.530
5306-ZZ	30	72	30.2	41000	28500	0.530
5307	35	80	34.9	48800	34000	0.730
5307-2RS	35	80	34.9	48800	34000	0.730
5307-ZZ	35	80	34.9	48800	34000	0.730

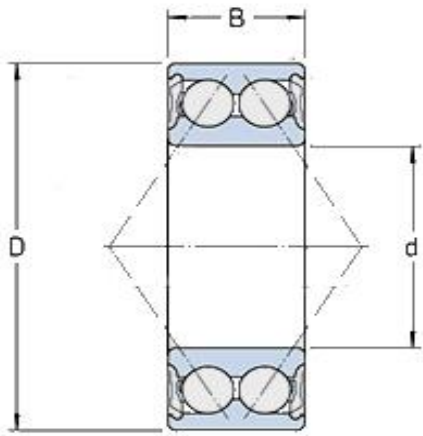

## 5300 Series Medium Duty Double Row Angular Contact Ball Bearings



Part Number	Dimensions			Load Rating		Weight (kg)
	d	D	B	Dynamic (N)	Static (N)	
5308	40	90	36.5	56200	43000	0.950
5308-2RS	40	90	36.5	56200	43000	0.950
5308-ZZ	40	90	36.5	56200	43000	0.950
5309	45	100	39.7	72100	73500	1.400
5309-2RS	45	100	39.7	72100	73500	1.400
5309-ZZ	45	100	39.7	72100	73500	1.400
5310	50	110	44.4	88000	96500	1.950
5310-2RS	50	110	44.4	88000	96500	1.950
5310-ZZ	50	110	44.4	88000	96500	1.950
5311	55	120	49.2	95200	108000	2.550
5311-2RS	55	120	49.2	95200	108000	2.550
5311-ZZ	55	120	49.2	95200	108000	2.550
5312	60	130	54	112000	127000	3.250
5312-2RS	60	130	54	112000	127000	3.250
5313	65	140	58.7	160000	126000	4.000
5313-2RS	65	140	58.7	160000	126000	4.000

*Suffix guide: 2RS = 2 Rubber Seals / ZZ = 2 Metal Dust Shields*