




75--DLG BEARING SERIES

Imperial Series - Parallel Outside, Grub Screw
Locking and Snap Ring with Groove

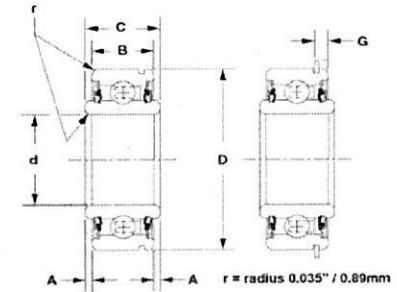

	Principle Dimensions										BASIC LOAD RATINGS			SET SCREWS	WEIGHT	
	Bore Size		Outer Dia		Outer Width		Inner Width		DYNAMIC	STATIC	N	W				
	in	mm	in	mm	in	mm	in	mm	in	mm			lbs			lbs
	+0.0008	+0.020	+0.0000	+0.000	+0.000	+0.000	+0.000	+0.000	+0.000	+0.000			KN			KN
-0.0000	-0.000	-0.0005	-0.013	-0.005	-0.13	mm	mm	-0.005	-0.13							
	d	D	B	A	F	G	K	C	Co							
7508DLG	0.5000"	1.7500"	0.6250"	0.0625"	1.009"	0.136"	0.7500"	2109	1131	10-32	0.33					
	12.700mm	44.450mm	15.875mm	1.5875mm	25.629mm	3.454mm	19.050mm	9.38	5.03							
7510DLG	0.6250"	1.7500"	0.6250"	0.0625"	1.009"	0.136"	0.7500"	2109	1131	10-32	0.29					
	15.875mm	44.450mm	15.875mm	1.5875mm	25.629mm	3.454mm	19.050mm	9.38	5.03							
7512DLG	0.7500"	1.7500"	0.6250"	0.0625"	1.009"	0.136"	0.7500"	2109	1131	10-32	0.31					
	19.050mm	44.450mm	15.875mm	1.5875mm	25.629mm	3.454mm	19.050mm	9.38	5.03							
7514DLG	0.8750"	2.0000"	0.6250"	0.0625"	1.009"	0.136"	0.7500"	2262	1315	1/4-28	0.36					
	22.225mm	50.800mm	15.875mm	1.5875mm	25.629mm	3.454mm	19.050mm	10.06	5.85							
7516DLG	1.0625"	2.0000"	0.6250"	0.0625"	1.009"	0.136"	0.7500"	2262	1315	1/4-28	0.33					
	26.988mm	50.800mm	15.875mm	1.5875mm	25.629mm	3.454mm	19.050mm	10.06	5.85							
7518DLG	1.1250"	2.5625"	0.7500"	0.0625"	1.672"	0.190"	0.8750"	4375	2543	1/4-28	0.8					
	28.575mm	65.088mm	19.050mm	1.5875mm	42.469mm	4.826mm	22.225mm	19.46	11.31							
7520DLG	1.2500"	2.5625"	0.7500"	0.0625"	1.672"	0.190"	0.8750"	4375	2543	1/4-28	0.57					
	31.750mm	65.088mm	19.050mm	1.5875mm	42.469mm	4.826mm	22.225mm	19.46	11.31							